


# Excel Solid Cat5e Cable U/UTP PVC Euroclass Eca 305m Box Grey

Item Code: 100-065

**excel**  
without compromise.

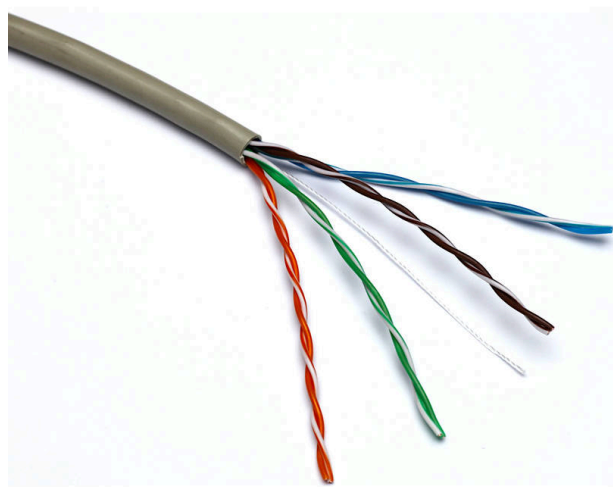

✕ Cat5e Solid Copper Cable

✕ U/UTP No Overall Screening

✕ No Conductor Screening

✕ Outer sheath colour Grey

✕ Reaction-to-fire class according to EN 13501-6: Eca

✕ 24 AWG size conductors

## Product Overview

Excel solid Cat5e ethernet cable U/UTP PVC CPR Euroclass Eca are manufactured and tested to ISO 11801, EN 50173 and ANSI/TIA-568-C Cat 5e specifications, 305m or 500m. Each cable consists of 8 colour coded solid copper polyethylene insulated conductors twisted together to form four pairs.

The whole cable is produced in a PVC sheath which is metre marked and labelled with part code and DoP information.

## Product Specifications

Feature	Values
Conductor surface	Bare
AWG size	24
Conductor category	Class 1 = solid
Total number of cores	8
Stranding element	Pairs
Specification core insulation	PE
Core identification	Colour
Overall screening	None
Conductor screening	None
Outer sheath material	PVC
Outer sheath colour	Grey


# Excel Solid Cat5e Cable U/UTP PVC Euroclass Eca 305m Box Grey

Item Code: 100-065

**excel**  
without compromise.

Reaction-to-fire class according to EN 13501-6	Eca
Flame retardant	In accordance with EN 60332-1-2 and EN 50399
Outer diameter approx.	5.2 mm
Operating Temperature Range	-10...75 °C
Category	5E
NVP value	70 %

## Cross-section diagram

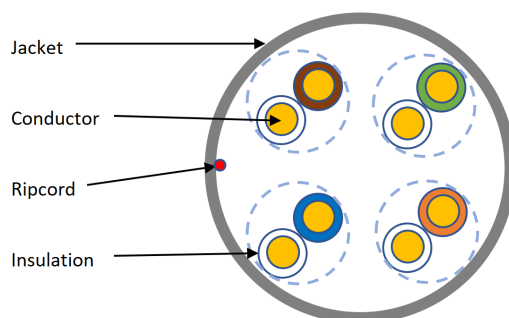

## Cable specifications

Features	Values
Dielectric strength	1200 V dc or 850 V ac
Maximum Pulling Load	60N/6.1KgF
MBR during installation	8x cable OD
MBR installed	4x cable OD
Ripcord	Nylon

## Standards

Applicable standard	Subject
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2020	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2018	Information technology. Generic cabling systems - Office premises
BS EN 50288-3-1:2013	Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unscreened cables characterised up to 250 MHz
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 60332-1-2:2004 + A12:2020	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
ANSI/TIA 568-D:2015	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 60754-2:2014	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A2:2020	Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements
EN 50575:2014 + A1:2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
RoHS	Compliant to the Restriction of Hazardous Substances
WFD	Compliant to Waste Framework Directive
SCIP	Compliant - Does Not Contain Substances of Concern in Products

# Excel Solid Cat5e Cable U/UTP PVC Euroclass Eca 305m Box Grey

Item Code: 100-065



## Part Number Table

Part Number	Description
100-065	Excel Solid Cat5e Cable U/UTP PVC Euroclass Eca 305m Box Grey

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at [sales@excel-networking.com](mailto:sales@excel-networking.com)



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.